

# Ultra-Mattes Reverse-Engravable


\*in Stock




**\*3X2-201** Matte/White  
**\*3X2-401** Matte/Black  
**\*3X2-511** Matte/Blue  
**\*3X2-601** Matte/Red  
**\*3X2-701** Matte/Yellow

Check to see what colors are in stock. Most colors can be ordered within two days. This material offers you exterior grade plastic with a smooth face. Food handling areas, solvent shops, and dash boards are most common. You can choose what color to paint fill the letters from the back.

Other available colors below are not normally stocked, but can be special ordered at an additional cost

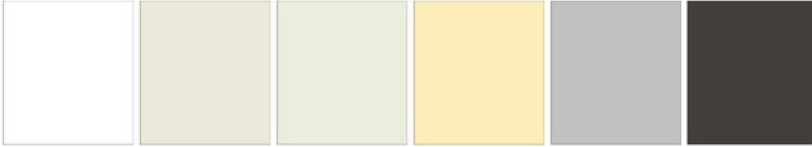

**3X2-101** Matte/Clear  
**3X2-211** Matte/Sandalwood  
**3X2-221** Matte/Ash  
**3X2-231** Matte/Ivory  
**3X2-241** Matte/Cement  
**3X2-301** Matte/Charcoal Grey

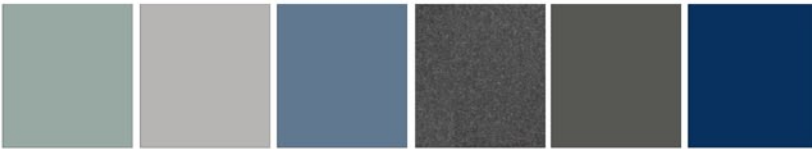

**3X2-311** Matte/Sea Grey  
**3X2-371** Matte/Vintage Silver  
**3X2-381** Matte/China Blue  
**3X2-391** Matte/Graphite  
**3X2-431** Matte/Cinder  
**3X2-541** Matte/Blueberry



**3X2-561** Matte/Sapphire  
**3X2-581** Matte/Driftwood  
**3X2-591** Matte/Ocean Blue  
**3X2-631** Matte/Ruby  
**3X2-651** Matte/Orange  
**3X2-661** Matte/Dusty Rose



**3X2-731** Matte/Vintage Gold  
**3X2-801** Matte/Taupe  
**3X2-811** Matte/Parchment  
**3X2-831** Matte/Beige  
**3X2-841** Matte/Dark Brown  
**3X2-861** Matte/Canyon



**3X2-901** Matte/Black Forest Green  
**3X2-911** Matte/Bright Green  
**3X2-921** Matte/Teal  
**3X2-931** Matte/Celadon Green  
**3X2-991** Matte/Hunter Green

Physical Properties	Typical Values	ASTM Method
<b>IZOD Impact Strength</b>		
Notched at 73°F (22.78°C)	1.10 ft lbs/in	D-256
<b>Tensile Strength</b>		
To break	5,500 psi	D-638
Elongation before break	50%	D-638
<b>Flexural Strength</b>		
Loan to stretch outer surface 5%	10,300 psi	D-790
<b>Specific Gravity</b>		
	1.15	D-792
<b>Rockwell Hardness</b>		
	M45	D-785
<b>Deflection Temperature</b>		
Temperature at which material deflects .010" (.254mm) at 264 psi	175°F (79.44°C)	D-648
<b>Coefficient of Thermal Expansion</b>		
Inch/inch/°F	5.6 x 10 <sup>-5</sup>	D-696
<b>Vicat Softening Point</b>		
Temperature for needle to penetrate 1mm (90°F/hr, 2.2 lbs)	208°F (97.78°C)	D-1525
Temperature for needle to penetrate 1mm (90°F/hr, 11.0 lbs)	187°F (86.11°C)	D-1525

**ULTRA-MATTES (REVERSE)** engraving material softens at about 200°F (93.33°C) sufficiently so that it can be bent as needed. It can be sawed, drilled and bonded, but not sheared. For best appearance, sawed edges should be buffed on material 1/8" (3.0mm) and thicker.

The base and cap materials, as well as the foils, were tested for flammability by Underwriters Laboratories. The base and cap materials are rated 94 HB on the UL 94 test. The foil was judged as not contributing to the combustion of the base material.

Under the ASTM Standard G-155, Ultra-mattes (reverse) engraving material was tested with a Xenon Arc Light Apparatus under specific, reproducible conditions. Testing resulted in no noticeable change in color after 300 hours of exposure to the Xenon Arc. Exposure to the Xenon Arc for 300 hours is supposedly the equivalent of approximately 3 years of exposure in a normal, mild climate, such as the Midwestern States of the United States.

This is not intended as a statement of warranty, rather a statement of general comparison.

NOTE: The above information is given in good faith, but no warranty, express or implied, is given.